

Shipboard UHF Antenna

AS-390/SRC (UHF)

GSA#: GS-35F-0020R


Description

The AS-390/SRC (UHF) is a vertically polarized broadband antenna designed for the UHF communications band. It is designed to withstand the most severe weather conditions. Protection from lightning is provided by grounding the top section of the stub through the stainless steel tie rod to the antenna ground plane.


Benefits

- Robust design and construction
- Antenna is pressure tested
- Low profile
- Ingress protection rating IP68
- Heavy duty radials
- Integrated Naval pressure fitting

ANTENNA PATTERNS (AS-390/SRC)

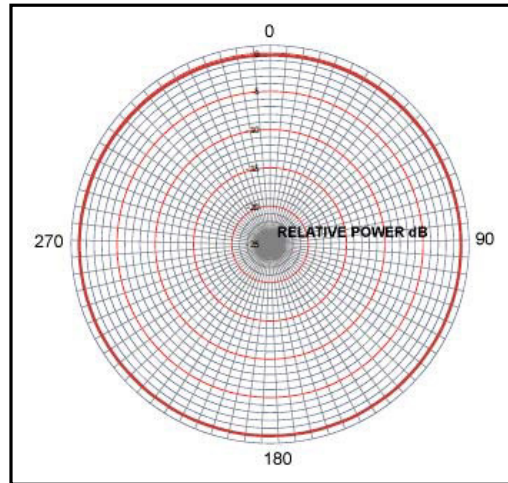

AS-390 (UHF) – AZIMUTH

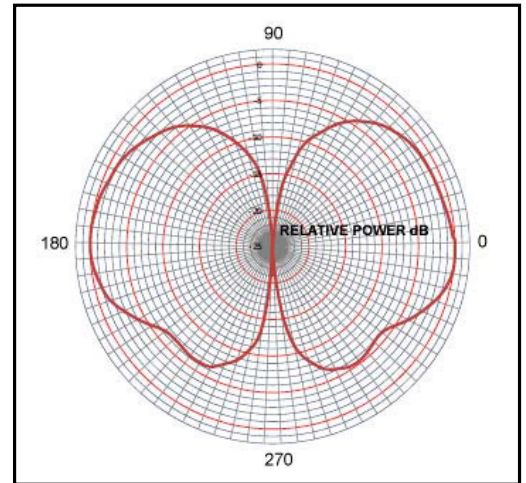

AS-390 (UHF) – ELEVATION

SHIPBOARD UHF ANTENNA MODEL AS-390/SRC (UHF)

- Very broadband
- Low VSWR
- Light Weight

TACO Antenna's ongoing policy of continuing development may result in specification changes to its products.

TELEPHONE

United States: 866.975.4433
 Canada: 519.756.7157
 Europe: (+44)07765.583491
 All Other Regions: 717.975.0885

TACO ANTENNA

(A division of Wade Antenna, Inc.)
 29 Sharp Road, Brantford, Ontario
 Canada N3T 5L8
www.tacoantenna.com

EMAIL

United States: sales@tacoantenna.com
 Canada: cansales@tacoantenna.com
 Europe: jbarton@tacoantenna.com
 All Other Regions: sales@tacoantenna.com
 SPEC0001_G01

ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE	225-400 MHz
GAIN (dBi)	2.0 (+0 / -1)
VSWR (Nom.)	Under 2:1
POLARIZATION	Vertical
CROSS POL REJECTION	20 dB
HORIZONTAL PATTERN	Omni Directional within 0.5 dB
HPBW	64°
IMPEDANCE	50 Ohm
TERMINAL TYPE	N Female
POWER RATING	700 Watts
OPERATING TEMPERATURE	-40° to 176°F (-40° to 80°C)
NSN (CAN)	5985-21-842-2439
NSN (US)	5985-00-519-9886

MECHANICAL SPECIFICATIONS

OVERALL HEIGHT	16 in. (40.64 cm)
STUB HEIGHT	9.625 in. (24.45 cm)
SKIRT DIAMETER	23 in. (58.42 cm)
WEIGHT	3.75 lbs (1.7 kg)
COLOR	Gray
MOUNT	¾-14 NPS Thread

WIND LOAD SPECIFICATIONS

WIND AREA	(NO ICE)	0.20 SQ. FT.
	(½" RADIAL ICE)	0.47 SQ. FT.
WIND LOAD	(NO ICE)	6.0 FT-LBS*
	(½" RADIAL ICE)	4.1 FT-LBS**
WIND RATING		160 M.P.H.***

* Wind Speed = 100 MPH at sea level with 100% Humidity at 70° F.

** Wind Speed = 50 MPH at sea level with 100% Humidity at 0° F.

*** Maximum Wind Speed at sea level with 100% Humidity at 70° F.
Safety Factor of 1.65 included.

TACO Antenna's ongoing policy of continuing development may result in specification changes to its products.

TELEPHONE

United States: 866.975.4433
Canada: 519.756.7157
Europe: (+44)07765.583491
All Other Regions: 717.975.0885

TACO ANTENNA

(A Division of Wade Antenna, Inc.)
 29 Sharp Road, Brantford, Ontario
 Canada N3T 5L8
www.tacoantenna.com

EMAIL

United States: sales@tacoantenna.com
Canada: cansales@tacoantenna.com
Europe: jbarton@tacoantenna.com
All Other Regions: sales@tacoantenna.com
 SPEC0001_G02