

D2000 Series: Muldipol Military Antennas

UHF Models

Description

Our Muldipol line of UHF dipole antennas have been specifically developed for air traffic control, ground-to-air, ground-air-ground, and naval applications.

TACO Antenna's multiple output antenna design offers the operation of up to four stacked dipoles operating simultaneously within one radome.

Reliable


- Rugged lightweight construction
- Long-term life cycle results in cost savings
- Transportable and compact
- 3 year warranty

Reduce Footprint





- Multiple outputs
- Combination of UHF frequencies
- High isolation between antenna elements

Proven Performance

- Used by NATO military forces/defence contractors around the world
- MIL-STD-810F
- Reduced installation time/cost for permanent installations

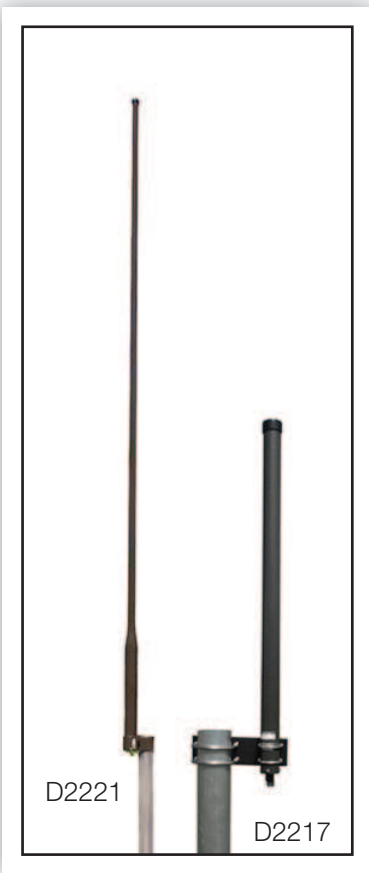

Model D2214 Electrical Test Results

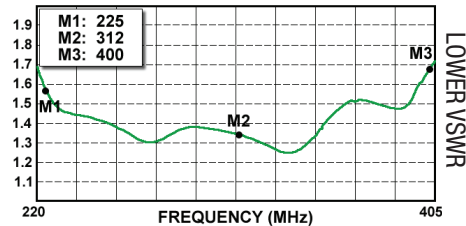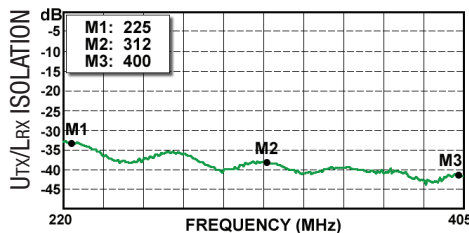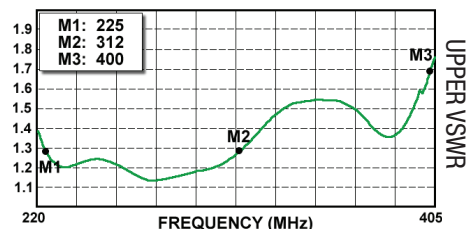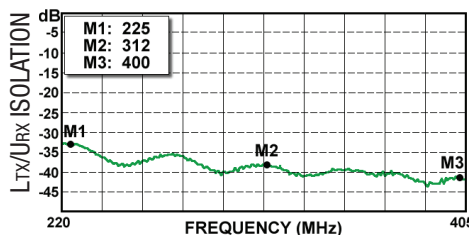

TACO Antenna's ongoing policy of continuing development may result in specification changes to its products.

TACO ANTENNA

(A division of Wade Antenna, Inc.)
29 Sharp Road, Brantford, Ontario
Canada N3T 5L8
www.tacoantenna.com

US SALES

Jeff Kunkle
Tel: 717.975.0885
TF: 866.975.4433
sales@tacoantenna.com

CANADIAN SALES

Tracy Plumstead
Tel: 519.756.7157 ext. 238
TF: 800.463.1607 ext. 238
cansales@tacoantenna.com

EUROPEAN SALES

Jon Barton
Tel: +44.01480.478770
Cell: +44.07538.737796
europesales@tacoantenna.com

GLOBAL SALES

Jeff Kunkle
Tel: 717.975.0885
TF: 866.975.4433
globalsales@tacoantenna.com

SPECIFICATIONS

Environmental

- Tested to MIL-STD810F
- Operational Temp -40° to 70°C (-40° to 158°F)

Electrical

- Polarization Vertical
- Omni Directionality within 1 dB
- VSWR (max.) 2:1
- Connector Type "N" Female
- Impedance 50 Ohms
- UHF Applied Power 250 W Continuous
- Vertical Beam Deviation ±10° (horizon)

MODEL	NUMBER OF CONNECTORS			GAIN (dBi)	ISOLATION MIN (dB)	HPBW (°)	CLAMP ID (IN)	LENGTH (IN/CM)	WEIGHT (LBS/KG)	NSN
	FREQUENCY (MHz)									
	225-400	400-470	400-500							
D2214	2			2.0	30	75	3	85.8/217.9	10/4.5	5985-01-287-7682
D2217	1			2.0	N/A	75	1.5-3	32.5/81.9	4/1.8	5985-01-129-7691
D2219	3			2.0	30	75	3	114.5/290.2	13/5.9	5985-01-154-7328
D2221	4			1.5	30	75	3	170.3/432.6	17.0/7.7	5985-01-315-5472
D2236		1		6.5	N/A	22	3	84.0/213.4	18/8.2	-
D2262	1			4.5	N/A	40	1.5-3	68.0/172.7	13/5.9	-
D2263	1			6.5	N/A	20	3	134.5/341.0	20/9.1	-
D2266	1			9.5	N/A	11	3	200.0/508.0	32/14.5	-
D2266D	2			5.5	30	25	3	200.0/508.0	32/14.5	-
D2274A	2			2.0	30	75	1.5-3	88.8/225.5	11/5.0	-
D2288			4	1.5	30	75	3	114.5/290.2	13/5.9	-

WIND LOAD SPECIFICATIONS

MODEL		D2214	D2217	D2219	D2221	D2231	D2236	D2262	D2263	D2266	D2266D	D2274A	D2288
ANTENNA PROJECTED AREA (ft ²)	NO ICE	1.21	0.32	1.61	2.12	1.58	1.62	1.00	1.57	3.30	3.30	1.31	1.54
	1/2" RADIAL ICE	1.87	0.54	2.53	3.37	2.47	2.36	1.45	2.45	4.80	4.80	1.92	2.40
BENDING MOMENT (ft-lbs)	*NO ICE	97.4	10.5	191.6	359.1	182.9	165.3	72.2	179.9	733.7	733.7	122.5	171.4
	**1/2" RADIAL ICE	39.5	4.6	78.9	147.9	74.6	61.1	26.9	73.4	267.9	267.9	45.3	69.9
***SURVIVAL RATING (mph) (NO ICE)		150	150	140	100	145	150	150	145	120	120	150	150

* Wind Speed = 100MPH

** Wind Speed = 50MPH

*** Safety Factor of 1.65 Included Per TIA-329

TACO Antenna also offers VHF and combined VHF/UHF multiple antenna combinations / options.

Please contact us for further details.

TACO Antenna's ongoing policy of continuing development may result in specification changes to its products.

TACO ANTENNA

(A division of Wade Antenna, Inc.)
29 Sharp Road, Brantford, Ontario
Canada N3T 5L8
www.tacoantenna.com

US SALES

Jeff Kunkle
Tel: 717.975.0885
TF: 866.975.4433
sales@tacoantenna.com

CANADIAN SALES

Tracy Plumstead
Tel: 519.756.7157 ext. 238
TF: 800.463.1607 ext. 238
cansales@tacoantenna.com

EUROPEAN SALES

Jon Barton
Tel: +44.01480.478770
Cell: +44.07538.737796
europesales@tacoantenna.com

GLOBAL SALES

Jeff Kunkle
Tel: 717.975.0885
TF: 866.975.4433
globalsales@tacoantenna.com