

## SAT-MP-320 TRIPOD REPLACEMENT

**MAKE SURE POWER IS DISCONNECTED PRIOR TO COMMENCING WORK OUTLINED IN THIS DOCUMENT**

### Package Contents

(1) Tripod Assembly	(1) Link Rod	(1) Pivot Pin S.S.	(1) Cam Lock Bearing
(1) Cam Lock Pin	(1) Cam Lock Handle	(1) Screw #10-32 X 1"	(1) Allen Key 5/32



Start with antenna in folded position



Spread Tripod Legs



Using supplied allen key remove screw




Remove, screw, handle, and pivot pin



Remove Bearing



Remove Tripod

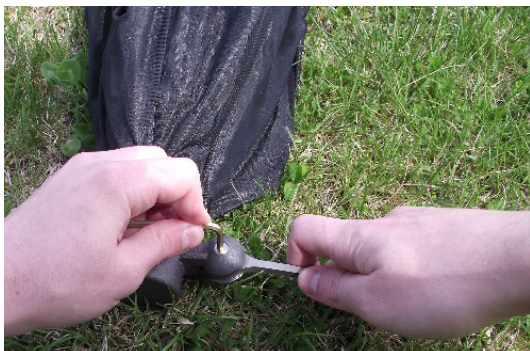

While slowly maneuvering link rod to align it with pin, apply pressure to pivot pin using allen key to push it out.



Remove pivot pin





Remove link rod



Insert new link rod and pivot pin



Slide new tripod on link rod



Place new lock bearing onto tripod with link rod in the slot.



Slide new lock pin into new handle



Insert new screw into lock pin



Screw into link rod to desired tightness. How tight it is will affect how easy or hard it is to lock the tripod with the handle.