



LPD-12 (vertical polarization shown)

Log Periodic Antennas

Models LPD-7V, LPD-12

The LPD Series Log Periodic antennas are rugged for harsh environments. Two models are available: LPD-7V & LPD-12. These Log Antennas are broadband and have flat gain levels across the entire frequency range. This broadband design minimizes de-tuning caused by ice. The antennas are cantilever mounted for ease of installation. All mounting hardware is included to mount up to a 3" O.D. pipe. The antennas are made of aluminum for light weight and longevity.

ELECTRICAL SPECIFICATIONS

MODEL		LPD-7V	LPD-12
FREQUENCY (MHz)		190-250	225-400
GAIN (dBi min.)		8.0	10.0
VSWR (max.)		1.75:1	1.75:1
POLARIZATION		Vertical	Horizontal or Vertical
HALF-POWER BEAM WIDTH (°)	E-PLANE	50	40
	H-PLANE	80	60
FRONT-TO-BACK RATIO (dB)		28	30
IMPEDANCE (Ohm)		50	50
TERMINAL IMPEDANCE		N Female	N Female
MAXIMUM POWER (Watts)		500	500

WIND LOAD SPECIFICATIONS

MODEL		LPD-7V	LPD-12
WIND LOAD AREA (sq. ft.)	No Ice	1.12	1.38
	0.5" Radial Ice	1.90	2.35
WIND LOAD (ft.-lbs.)	* No Ice, 100 MPH wind	109	134
	** 0.5" Radial Ice, 50 MPH wind	52	64

* Wind Speed = 100 MPH at sea level with %100 Humidity at 70° F
 ** Wind Speed = 50 MPH at sea level with %100 Humidity at 0° F


MECHANICAL SPECIFICATIONS

MODEL	LPD-7V	LPD-12
LENGTH - in (cm)	66.625 (164.15)	79.50 (201.93)
NUMBER OF ELEMENTS	7	12
LONGEST ELEMENT - in (cm)	32 (81.3)	26.75 (67.95)
WEIGHT - lbs (kg)	9.5 (4.3)	14 (6.35)
MOUNTING - in (cm)	3 O.D. max (7.82)	3 O.D. max (7.82)
OPERATING TEMPERATURE	-40 to +80	-40 to +80


TACO Antenna's ongoing policy of continuing development may result in specification changes to its products.

ELECTRICAL SPECIFICATIONS


LPD-7V H-PLANE

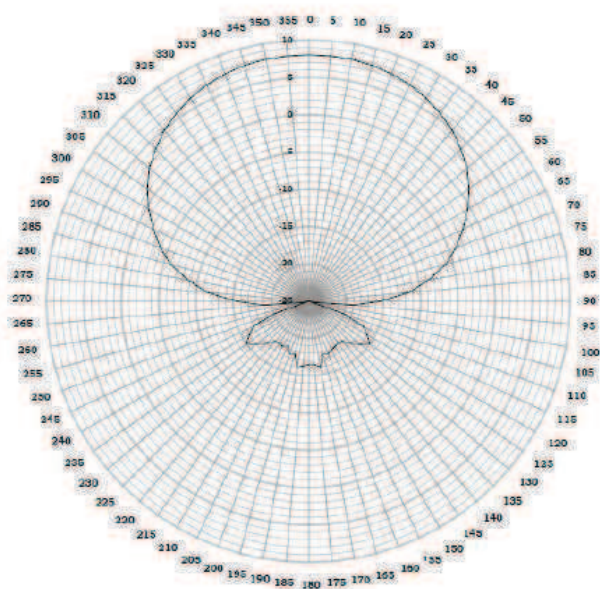

LPD-7V E-PLANE

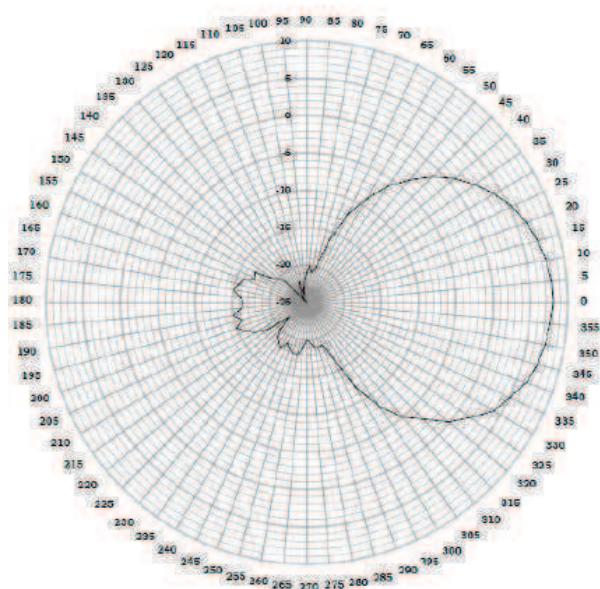

LPD-12 H-PLANE

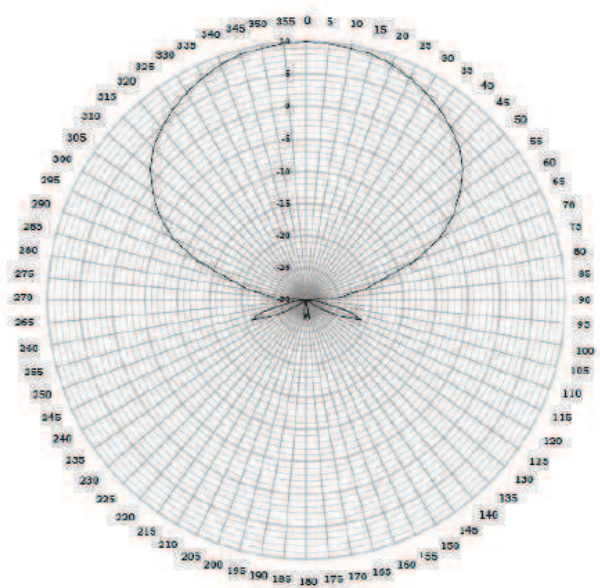

LPD-12 E-PLANE

